


DESCRIPTION

- Protection class IP 68
- Entirely made of stainless steel 316Ti
- Round attachment cover, height 5mm
- To fit on nozzles up to 1/1.2/1.5/2 inch
- Toughened safety glass (ESG)- withstands loads of up to 650 kg
- POWER-LED cold white, warm white, neutral white, blue
- Multichip POWER-LED RGB, RGBW
- Operating mode: constant current or constant voltage
- Rotationally symmetric light distribution
- Cable pressure sleeve, stainless steel 316Ti
- Supplied with 5m of UW-cable

Toughened safety glass

- Height 10mm
- Efficiency > 85%

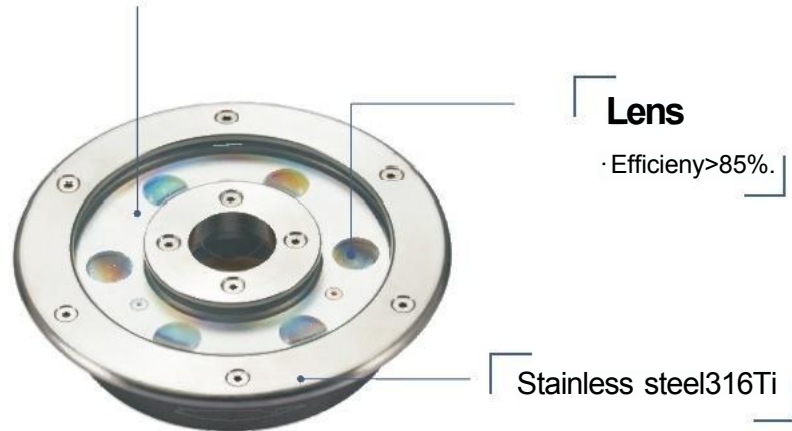

IP 68

STAINLESS
STEEL V4A
1.4571
316Ti

2700K
3000K
4000K

RGB
RGBW

DMX

FC

CE

RoHS



For illumination of fountains.

Technical Parameters

Power Consumption	Max. 9W	Max. 24W
Qty of LEDs	9PCS	6PCS
LED Source	CREE, ORSAM, LUMILEDS	
LED Source Luminous Efficacy	130Lm/w (2700K), 140Lm/w (3000K), 150Lm/w (4000K), 150Lm/w (6000K)	
CRI	Ra ≥ 80	
CCT/Color	2700K、3000K、4000K、RGB、RGBW	
Lumen Maintenance	50,000 hrs L70 at 25°C	
Beam Angle	10°、30°	
Input	350MA、500MA、24VDC	
Control	On/OFF、DMX512	
Materials	Stainless Steel 316 & Tempered Glass	
Size	φ165 × H40mm	
Weight	0.5kg	
Mech impact protection	IK10	
Protection	IP68	
Operating Temperature	-20°C ~ 50°C / -4°F ~ 122°F	
Storage Temperature	-30°C ~ 80°C / -22°F ~ 176°F	
Certification	FCC, CE, ROHS, CCC	

Dimensions

Unit:mm

