


DESCRIPTION

- Protection class IP 68
- Entirely made of stainless steel 316Ti
- Round or square attachment cover, height 3mm
- Toughened safety glass (ESG)- withstands loads of up to 650 kg
- POWER-LED cold white, warm white, neutral white,blue
- Multichip POWER-LED RGB,RGBW
- Operating mode: constant current or constant voltage
- Rotationally symmetric light distribution
- Cable pressure sleeve, stainless steel 316Ti
- Supplied with 5m of UW-cable

Toughened safety glass

- Height 5mm
- Efficiency>85%

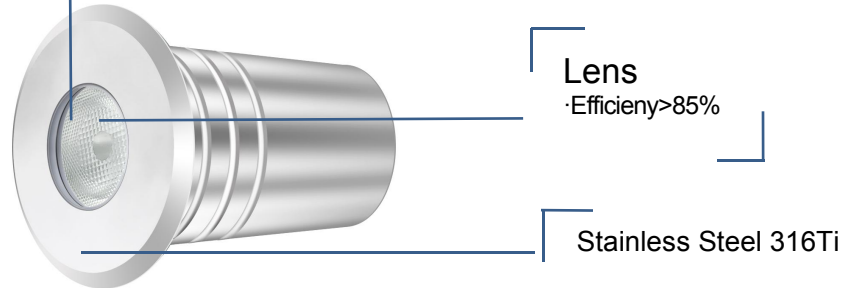

IP 68

IK 10

STAINLESS
STEELV4A
1.4571
316Ti

3000K
4500K
6000K

RGBW

ON/OFF

DMX

DALI



For accentuation in small swimming pools, whirlpools and water displays.

Technical Parameters

	LX-UD-001B	LX-UD-001B1
Power Consumption	Max. 3W	Max. 4W
Qty of LED	1PCS	
LED Type	CREE、ORSAM、LUMILEDS	
LED Source Luminous Efficacy	140Lm/w(3000K)、150Lm/w(4000K)、150Lm/w(5000K)	
CRI	Ra≥80	
CCT/Color	3000K、4500K、6000K、RGBW	
Lumen Maintenance	50,000 hrs L70 at 25°C	
Beam Angle	10°、30°	
Input Voltage	350mA、700mA、12VDC、24VDC	
Control	ON/OFF、DMX512、DALI	
Material	Stainless Steel 316Ti & Tempered Glass	
Size	φ50*H46mm	φ50*H70mm
Weight	0.4kg	0.53kg
Mech impact protection	IK10	
Protection	IP68	
Operating Temperature	-20°C ~ 50°C / -4°F ~ 122°F	
Storage Temperature	-30° C ~ 80°C / -22°F ~ 176°F	
Certification	FCC、CE、ROHS、CCC	

Dimensions

Unit: mm

