


DESCRIPTION

- Protection system IP 67
- Linear lighting fixture
- Cover made of finished transparent PC
- Housing made of anodised aluminium
- Low-Power-LED cold white,warm white,neutral white,RGB,RGBW
- Operating mode:constant voltage and DMX512 control available
- Installation without any gap of numerous fixtures possible,line of light without any gaps
- Connection with special cable connectors (plug and socket)
- UV resistance of all materials
- 1000mm versions available(to be ordered separately according to project needs!)

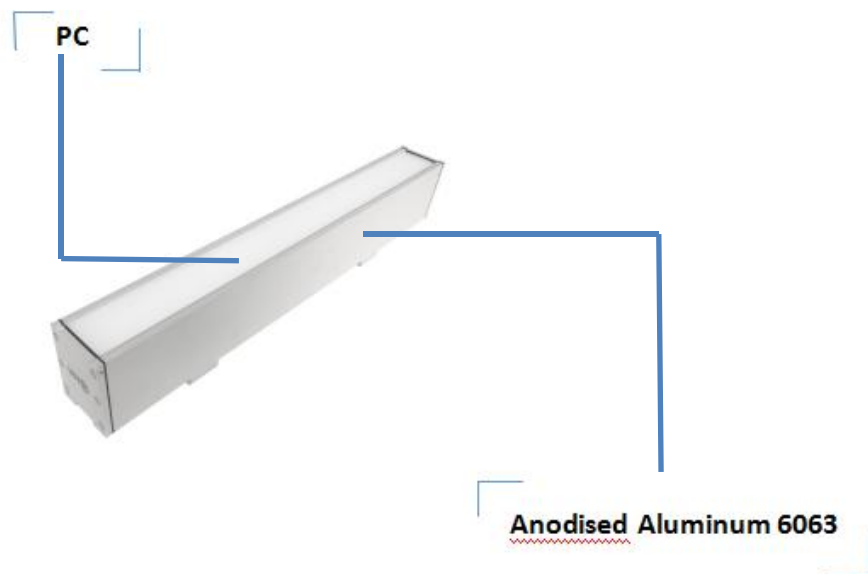


For indoor and outdoor architectural linear lighting

Technical Parameters

	LX-L19C
Power Consumption	Max. 40W
Qty of LEDs	120PCS
LED Source	CREE、ORSAM、LUMILEDS
LED Source Luminous Efficacy	135 Lm/w(3000K)、140 Lm/w(4000K)、150 Lm/w(6000K)
CRI	Ra≥80
CCT/Color	3000K、4500K、6000K、RGBW
Lumen Maintenance	50,000 hrs L70 at 25°C
Beam Angle	120°
Input	AC220-240V 50/60HZ
Control	ON/OFF、DMX512、DALI
Materials	Aviation Aluminum 6063 & PC
Size	1000*60*804mm
Weight	3.541kg
Mech impact protection	IK08
Protection	IP67
Operating Temperature	-20°C ~ 50°C / -4°F ~ 122°F
Storage Temperature	-30° C ~ 80°C /-22°F ~ 176°F
Certification	FCC、CE、ROHS、CCC

Dimensions

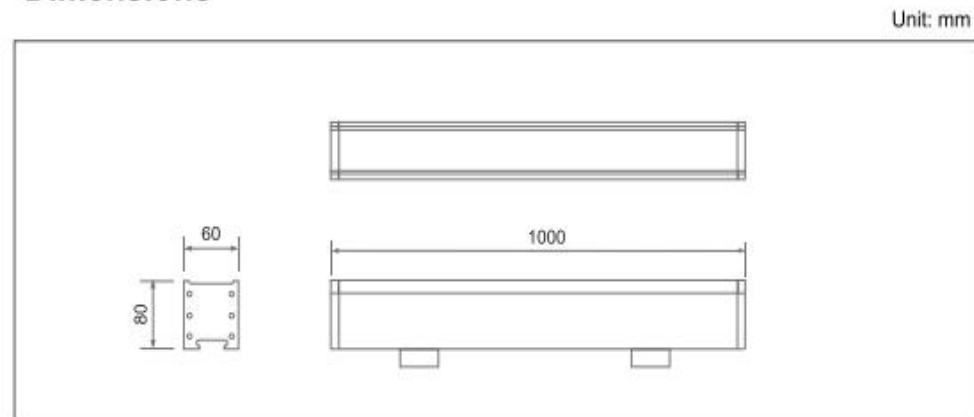

www.sz-lesan.com

IP 67

IK 08

AVIATION
ALUMINUM
6063

3000K
4500K
6000K

RGBW

ON/OFF

DMX

DALI

