


DESCRIPTION

- Protection system IP 66
- Linear lighting fixture
- Cover made of opal PMMA diffuser
- Housing made of anodised aluminium
- Low-Power-LED cold white,warm white,neutral white,RGB,RGBW
- Operating mode:constant voltage and DMX512 control available
- Installation without any gap of numerous fixtures possible,line of light without any gaps
- Connection with special cable connectors (plug and socket)
- UV resistance of all materials
- 1000mm versions available(to be ordered separately according to project needs!)

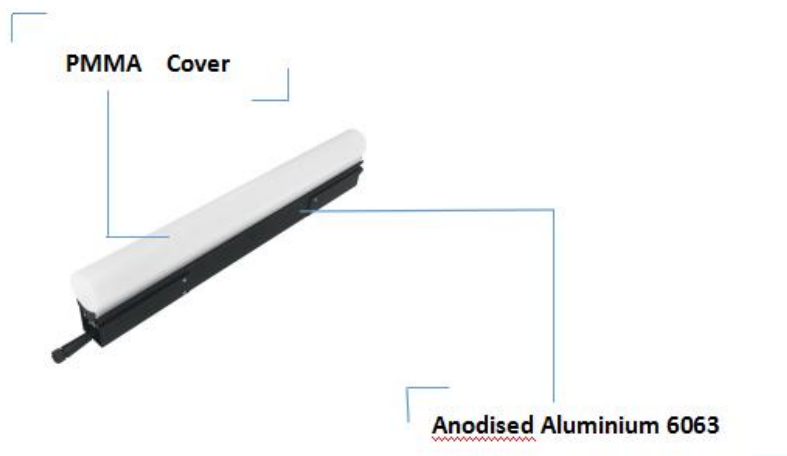

IP 66

IK 08

AVIATION
ALUMINIUM
6063

3000K
4500K
6000K

RGBW

ON/OFF

DMX

DALI




For indoor and outdoor architectural linear lighting

Technical Parameters

| | |
|------------------------------|---|
| | LX-L25 |
| Power Consumption | Max. 15W |
| Qty of LEDs | 72PCS(16 Pixel) |
| LED Source | CREE、ORSAM、LUMILEDS |
| LED Source Luminous Efficacy | 135 Lm/w(3000K)、140 Lm/w(4000K)、150 Lm/w(6000K) |
| CRI | Ra≥80 |
| CCT/Color | 3000K、4500K、6000K、RGBW |
| Lumen Maintenance | 50,000 hrs L70 at 25°C |
| Beam Angle | 120° |
| Input | 24VDC、48VDC |
| Control | ON/OFF、DMX512、DALI |
| Materials | Aviation Aluminum 6063 & Opal PMMA Diffuser |
| Size | 1000*45*92mm |
| Weight | 1.66kg |
| Mech impact protection | IK08 |
| Protection | IP66 |
| Operating Temperature | -20°C ~ 50°C / -4°F ~ 122°F |
| Storage Temperature | -30° C ~ 80°C / -22°F ~ 176°F |
| Certification | FCC、CE、ROHS、CCC |

Dimensions

Unit: mm

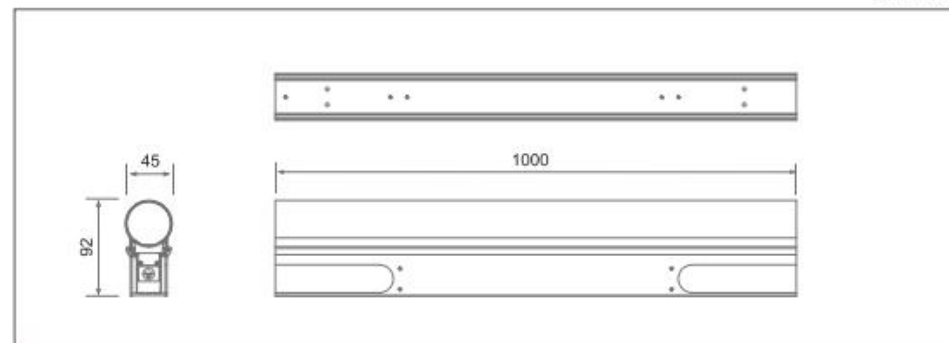

www.sz-lesan.com