


DESCRIPTION

- Protection class IP 68
- Entirely made of stainless steel 316Ti
- Round or square attachment cover
- Toughened safety glass (ESG)-withstands loads of up to 650 kg
- POWER-LED cold white,warm white,neutral white,blue
- Multichip POWER-LED RGB,RGBW
- Operating mode:constant current or constant voltage
- Rotationally symmetric light distribution
- Cable pressure sleeve,stainless steel 316Ti
- Supplied with 5m of UW-cable

Toughened Safety glass

- Height 8mm
- Efficiency>85%

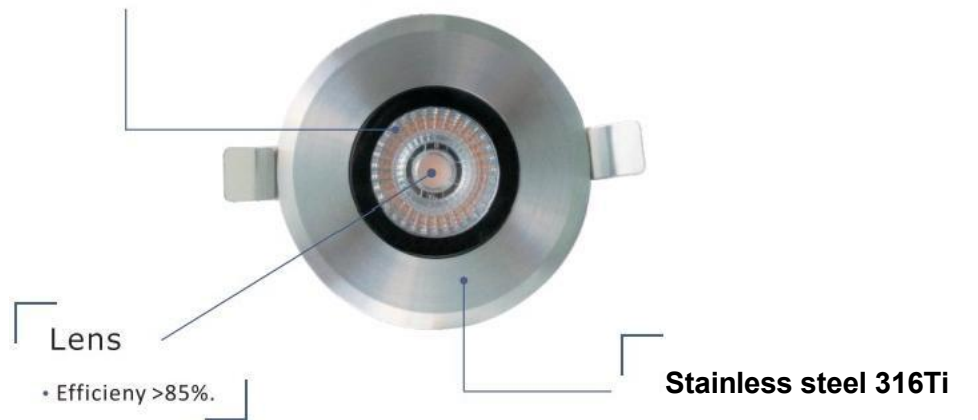


For accentuation in small swimming pools,whirlpools, jacuzzis and water bodies and water displays.

Technical Parameters

	LX-UG-012
Power Consumption	Max. 15W
Qty of LED	1PCS
LED Type	CREE、ORSAM、LUMILEDS
LED Source Luminous Efficacy	135 Lm/w(3000K)、140 Lm/w(4000K)、150 Lm/w(5000K)
CRI	Ra≥80
CCT/Color	3000K、4500K、6000K、RGBW
Lumen Maintenance	50,000 hrs L70 at 25°C
Beam Angle	25°
Input Voltage	AC220V
Control	ON/OFF、DMX512、DALI
Material	Stainless Steel 316Ti & Tempered Glass
Size	φ120× H51mm
Weight	0.9kg
Mech impact protection	IK10
Protection	IP67
Operating Temperature	-20°C ~ 50°C / -4°F ~ 122°F
Storage Temperature	-30° C ~ 80°C /-22°F ~ 176°F
Certification	FCC、CE、ROHS、CCC

Dimensions

Unit:mm

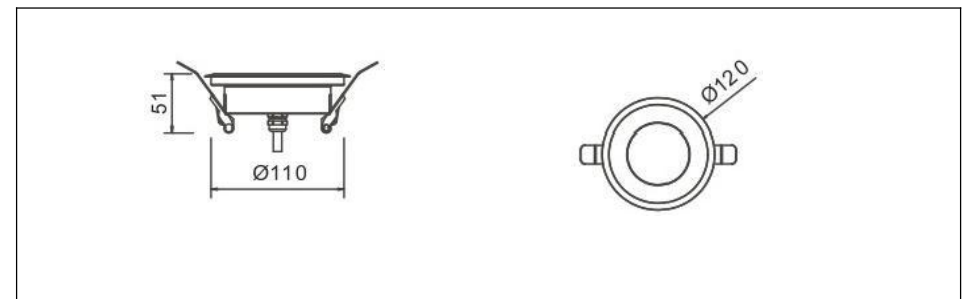

IP 67

IK 10

STAINLESS
STEELV4A
1.4571
316Ti

3000K
4500K
6000K

RGBW

ON/OFF

DMX

DALI

