


DESCRIPTION

- Protection system IP 65
- Entirely made of Aviation Aluminum body and Anti-glare cover
- Power-LED cold white,warm white,neutral white
- Multichip Power-LED RGB,RGBW
- Operating mode:constant voltage and DMX512 control available
- Rotationally symmetric light distribution

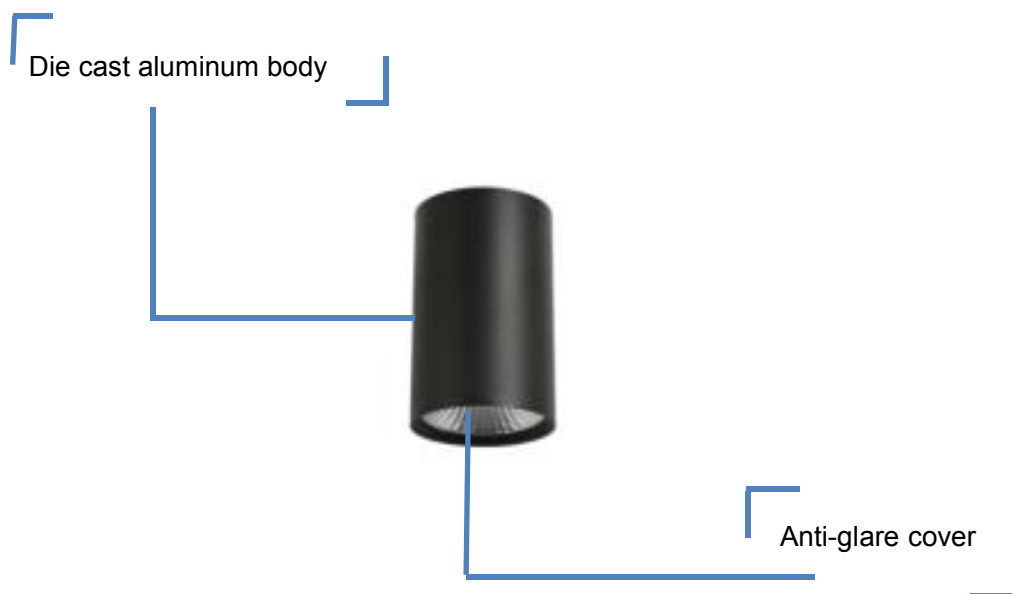

For open ceiling downlights are used in hotels, office buildings, home and other places

Technical Parameters

	LX-UG-011
Power Consumption	Max. 15W
Qty of LEDs	1PCS
LED Source	CREE、ORSAM、LUMILEDS
LED Source Luminous Efficacy	135 Lm/w(3000K)、140 Lm/w(4000K)、150 Lm/w(5000K)
CRI	Ra≥80
CCT/Color	3000K、4500K、6000K、RGBW
Lumen Maintenance	50,000 hrs L70 at 25°C
Beam Angle	25°
Input	AC220V
Control	ON/OFF、DMX512、DALI
Materials	Die Cast Aluminum Body & Tempered Glass
Size	∅120× H150mm
Weight	1.41Kg
Mech impact protection	IK08
Protection	IP65
Operating Temperature	-20°C ~ 50°C / -4°F ~ 122°F
Storage Temperature	-30° C ~ 80°C /-22°F ~ 176°F
Certification	FCC、CE、ROHS、CCC

Dimensions

Unit:mm

