


DESCRIPTION

- Protection system IP 66
- Linear lighting fixture
- Fully encapsulated
- Anti skid toughened safety glass,height 3MM
- Housing made of anodised aluminium
- Power-LED cold white,warm white,neutral white,RGB,RGBW
- Operating mode:constant voltage and DMX512 control available
- Connection with special cable connectors(plug and socket)
- 1000mm versions available(to be ordered separately according to project needs!)

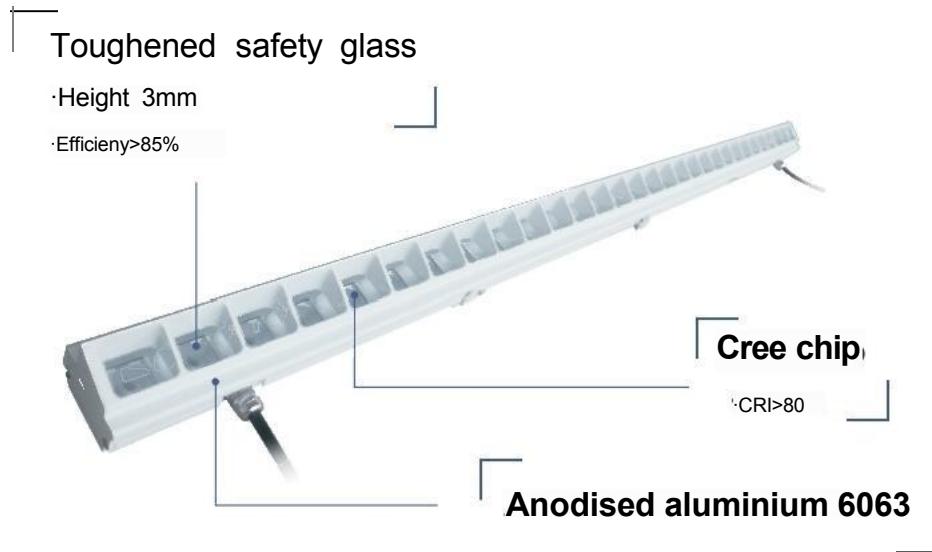

IP 66

IK 08

AVIATION
ALUMINUM
6063

3000K
4500K
6000K

RGBW

ON/OFF

DMX

DALI



For indoor and outdoor architectural linear lighting

Technical Parameters

	LX-XT-007
Power Consumption	Max. 30W
Qty of LEDs	30PCS
LED Source	CREE、ORSAM、LUMILEDS
LED Source Luminous Efficacy	135 Lm/w(3000K)、140 Lm/w(4000K)、150 Lm/w(5000K)
CRI	Ra≥80
CCT/Color	3000K、4500K、6000K、RGBW
Lumen Maintenance	50,000 hrs L70 at 25°C
Beam Angle	14°
Input	24VDC
Control	ON/OFF、DMX512、DALI
Materials	Aviation Aluminum 6063 & Toughened Glass
Size	1000*47.6*70.3mm
Weight	2.1kg
Mech impact protection	IK08
Protection	IP66
Operating Temperature	-20°C ~ 50°C / -4°F ~ 122°F
Storage Temperature	-30°C ~ 80°C / -22°F ~ 176°F
Certification	FCC、CE、ROHS、CCC

Dimensions

